



VACUUM CLEANERS - SPECIAL SOLUTIONS - HIGH REACH POINTS

# KP 2/72 SKYVAC COMMERCIAL

POWER MAX

2400 W

WATER LIFT

2470 mmH<sub>2</sub>O

AIRFLOW

420 m<sup>3</sup>/h

TANK CAPACITY


72 l



## EXCLUSIVE FEATURES

- ▶ INNOVATIVE GASKET
- ▶ STRONG HOOKS
- ▶ INDEPENDENT MOTORS WITH LIGHT SWITCHES
- ▶ SEALANT FLOATER & INTEGRATED ANTIFOAM SYSTEM
- ▶ TIPPING TROLLEY
- ▶ RELIABLE CONSTRUCTION FOR INTENSIVE USE
- ▶ DOUBLE STAGE MOTOR

## MOST FREQUENTLY USE

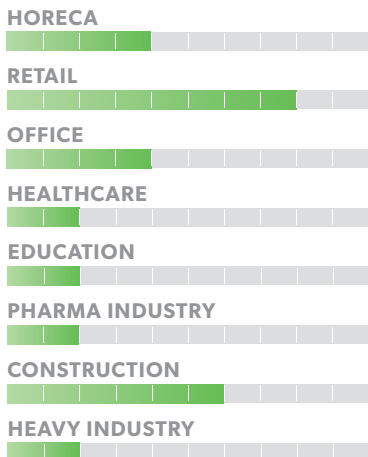

## INNOVATIONS



## SPECS



TIPPING TROLLEY



TANGENTIAL INLET



WASHABLE CARTRIDGE

## TECHNICAL DATA

### KP 2/72 SKYVAC COMMERCIAL

Code		ASD015554
PERFORMANCE		
Usage		WET & DRY
Motor		2x2 stage
Power	W	2000-2400 max
Voltage	V	220-240
Water lift	mmH <sub>2</sub> O	2470
Airflow	m <sup>3</sup> /h	420
Tank Capacity/Material	l	72/plastic
Cable length	m	8,5
Sound Pressure Level (EN 60704-1; EN 60704-2-1; IEC 60335-2-69)	dB(A)	74
Diameter of flexible hose	mm	50
Dimensions (LxWxH)	mm	550x600x1030
Weight	kg	21

## STANDARD EQUIPMENT

CODE: FTDP44260  
POLY CARTRIDGE



CODE: MPVR28723  
FASTENING PLASTIC RING



CODE: TBFX00820  
FLEXIBLE HOSE 6 m Ø50 mm



CODE: KTRI04657  
HOSE CUFF  
(FLEXI HOSE TO POLE)



## OPTIONAL ACCESSORIES

Set up your vacuum cleaner with many other accessories (look at page 190-191)