




GS 3/78 OIL

EXCLUSIVE FEATURES

- ▶ INNOVATIVE GASKET
- ▶ INDEPENDENT MOTORS WITH LIGHT SWITCHES
- ▶ DRAIN HOSE
- ▶ TIPPING TROLLEY
- ▶ W SYSTEM - 2 IN 1 FILTRATION
- ▶ DETACHABLE TANK AND SOLID CART
- ▶ TANGENTIAL OR METAL INLET
- ▶ DOUBLE STAGE MOTORS AND TURBINE
- ▶ SIEVE BASKET & ANTI BLOCK FLOATING SYSTEM
- ▶ SAFETY VALVES AND DRAIN SYSTEM
- ▶ TANGENTIAL INLET AND CONVEYOR CONE

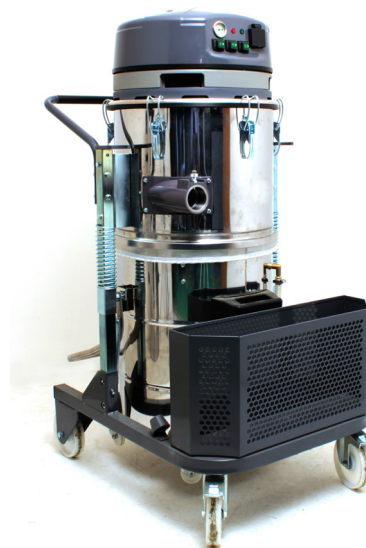

PLANET OIL 3M

EXCLUSIVE FEATURES

- ▶ INDEPENDENT MOTORS WITH LIGHT SWITCHES
- ▶ DRAIN HOSE
- ▶ RELIABLE CONSTRUCTION FOR INTENSIVE USE
- ▶ DETACHABLE TANK AND SOLID CART
- ▶ TANGENTIAL OR METAL INLET
- ▶ DOUBLE STAGE MOTORS AND TURBINE
- ▶ BIG AND BRAKED WHEELS
- ▶ QUICK MAINTENANCE FRAMEWORK WITH DETACHABLE TANK
- ▶ SIEVE BASKET & ANTI BLOCK FLOATING SYSTEM
- ▶ ANTISKID WHEELS WITH BRAKES
- ▶ VISUAL FILLING INDICATOR
- ▶ SAFETY VALVES AND DRAIN SYSTEM
- ▶ INDUSTRIAL FRAMEWORK WITH AISI 304 WITH DETACHABLE TANK
- ▶ TANGENTIAL INLET AND CONVEYOR CONE
- ▶ VACUUM RELIEF VALVE AND FILTRATION LEVEL INDICATOR

		GS 3/78 OIL
Code		ASD015122
TECHNICAL DATA		
Usage		WET & DRY
Number of phases		single phase
Voltage	V	220-240
Frequency	Hz	50-60
N. and type of motor		3x2 stages
Power	W	3000-3600 max
Water lift	mmH ₂ O	2470
Airflow	m ³ /h	630
Tank Capacity	l	78
Bucket sieve capacity	l	30
Diameter of inlet	mm	60
Sound Pressure Level	dB(A)	76
Dimensions (LxWxH)	mm	550x600x980
Weight	Kg	28

		PLANET OIL 3M
Code		ASID00524
TECHNICAL DATA		
Usage		WET & DRY
Number of phases		single phase
Voltage	V	220-240
Frequency	Hz	50-60
N. and type of motor		3x2 stages
Power	W	3600-3800 max
Water lift	mmH ₂ O	2795
Airflow	m ³ /h	630
Tank Capacity	l	100
Bucket sieve capacity	l	40
Diameter of inlet	mm	60
Sound Pressure Level	dB(A)	76
Dimensions (LxWxH)	mm	850x650x1350
Weight	Kg	65

STANDARD EQUIPMENT

CODE: FTDP00285
POLYESTER CARTRIDGE



CODE: FTDP28755
MESH FILTER



CODE: SECC00116
BUCKET SIEVE



STANDARD EQUIPMENT

CODE: KTRI02521
FILTERING KIT
(3100 + 1500 cm²)



CODE: FTCC00011
NYLON FILTER (PA 200 μ)



CODE: SECC00113
BUCKET SIEVE



OPTIONAL ACCESSORIES

Anti-oil tool kit Ø38-60 mm
Anti-oil tool kit Ø50-60 mm

PMDT00928
PMDT00447

OPTIONAL ACCESSORIES

Anti-oil tool kit Ø50-60 mm

PMDT00449