



IPC

BY TENNANT COMPANY

SCRUBBER DRYERS - WALK BEHIND

CT51



MAX PRODUCTIVITY

Up to
3150 m²/h

BATTERIES RUNNING TIME

3,5 h

WATER TANK RUNNING TIME

Up to **60'**
working session



MEMORY CARD



TELEMATICS GPS (opt)

GEOLOCATION OF
ALL YOUR MACHINES




ANC

ADVANCE NOISE CONTROL
54 dB IN ECO SELECT MODE



ORBITAL VERSION

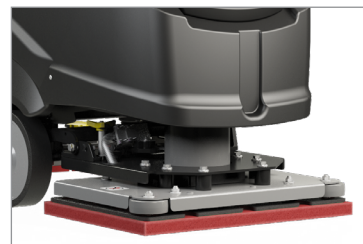

ONE BRUSH VERSION



ROLLER VERSION



CERTIFICATIONS



GREEN CLEANING
EFFICIENCY



ISO 14067 CARBON
FOOTPRINT CERTIFIED

BATTERIES AND BATTERY CHARGER NOT INCLUDED

MOST FREQUENTLY USE

RETAIL



HORECA



CLEANING CONTRACTORS



MUNICIPALITIES



INNOVATIONS



INTER-
CHANGEABLE
BRUSH
HEAD



600 RPM
INTERCHANGEABLE
BRUSH HEAD



ORBITAL
BRUSH



DBL™
DOUBLE
BATTERY
LIFE



MEMORY
CARD



SLS™
SELF
LEVELING
SYSTEM



ECO
SELECT



SERVICE
MENU



BACTERIA
CONTROL



ANTIBACTERIAL
PLASTIC


SPECS



ADJUSTABLE HANDLE FOR
A COMFORTABLE AND EASY
USE.



FULL MACHINE CONTROL
THANKS TO AN INTUITIVE
CENTRAL KNOB.



EASY ACCESS NO TOOLS

TECHNICAL DATA

WITHOUT ELECTRIC TRACTION

WITH ELECTRIC TRACTION

		CT51 B50	CT51 B55	CT51 BT55	CT51 BT55 ANTIBACTERIAL	CT51 BT60	CT51 BT70
Code		LPTB02976	LPTB01822	LPTB01823	LPTB03425	LPTB01826	LPTB01824
PERFORMANCE							
Max theoretical productivity	m²/h	1850	1925	2475	2475	2700	3150
Cleaning path	mm	500	550	550	550	600	700
Water tank capacity (solution recovery)	l	50/53	50/53	50/53	50/53	50/53	50/53
Max running time	min	210	210	210	210	210	210
Voltage	V-Ah	24	24	24	24	24	24
Installed power	W	800	800	1000	1000	1400	1400
Brush pressure	kg	18	18	18	18	23	23
Squeegee width	mm	815	815	815	815	815	940
Max speed	km/h	3,5	3,5	4,5	4,5	4,5	4,5
Weight (Without Batteries)	kg	81,1	81,4	89,1	89,1	97,1	94,6
Dimension (LxWxH)	mm	1328 x 563 x 1033	1328 x 563 x 1033	1329 x 563 x 1033	1329 x 563 x 1033	1279 x 653 x 1033	1279 x 735 x 1033

STANDARD EQUIPMENT

	CT51 B50	CT51 B55	CT51 BT55	CT51 BT55 ANTIBACTERIAL	CT51 BT60	CT51 BT70
BRUSHES						
PPL SOFT	SPPV01332	SPPV01352	SPPV01352	SPPV01352	2XSPPV01473	2xSPPV01472
SQUEEGEE BLADES						
LATEX FRONT BLADE	MPVR08039 - 880mm	MPVR08039 - 880mm	MPVR08039 - 880mm	MPVR08039 - 880mm	MPVR08039 - 880mm	MPVR08040 - 1020mm
LATEX REAR BLADE	MPVR08035 - 900mm	MPVR08035 - 900mm	MPVR08035 - 900mm	MPVR08035 - 900mm	MPVR08035 - 900mm	MPVR08036 - 1020mm

CABLE

		CT51 C50 230V LPTE00669	CT51 C55 230V LPTE00646
PERFORMANCE			
Max theoretical productivity	m²/h	1850	1925
Cleaning path	mm	500	550
Water tank capacity (solution recovery)	l	50/53	50/53
Max running time	min	Unlimitess	Unlimitess
Voltage	V-Ah	230	230
Installed power	W	1100	1100
Brush pressure	kg	18	18
Squeegee width	mm	815	815
Max speed	km/h	3,5	3,5
Weight (Without Batteries)	kg	102	102,1
Dimension (LxWxH)	mm	1329 x 563 x 1033	1329 x 563 x 1033

STANDARD EQUIPMENT

	CT51 C50 230V	CT51 C55 230V
BRUSHES		
PPL SOFT	SPPV01332	SPPV01352
SQUEEGEE BLADES		
LATEX FRONT BLADE	MPVR08039 - 880mm	MPVR08039 - 880mm
LATEX REAR BLADE	MPVR08035 - 900mm	MPVR08035 - 900mm

TECHNICAL DATA

WITH ELECTRIC TRACTION AND ELECTRONIC BRUSH PRESSURE CONTROL

ROLLER - WITH ELECTRIC TRACTION AND ELECTRONIC BRUSH PRESSURE CONTROL

Code		CT51 XP60 LPTB01828	CT51 XP70 LPTB01825	CT51 XP55R LPTB01834
PERFORMANCE				
Max theoretical productivity	m ² /h	2700	3150	2475
Cleaning path	mm	600	700	550
Water tank capacity (solution recovery)	l	50/53	50/53	50/53
Max running time	min	210	210	210
Voltage	V-Ah	24	24	24
Installed power	W	1450	1450	2350
Brush pressure	kg	31	31	18
Squeegee width	mm	815	940	815
Max speed	km/h	4,5	4,5	4,5
Weight (Without Batteries)	kg	97,1	94,6	107
Dimension (LxWxH)	mm	1279 x 653 x 1033	1279 x 735 x 1033	1329 x 563 x 1033

STANDARD EQUIPMENT

	CT51 XP60	CT51 XP70	CT51 XP55R
BRUSHES			
PPL SOFT	2xSPPV01473	2XSPPV01472	-
CYLINDRICAL BRUSH - PPL SOFT Ø 0,3 mm	-	-	SPPV01163
SQUEEGEE BLADES			
LATEX FRONT BLADE	MPVR08039 - 880mm	MPVR08040 - 1020mm	MPVR08039 - 880mm
LATEX REAR BLADE	MPVR08035 - 900mm	MPVR08036 - 1020mm	MPVR06288 - 715mm

600 RPM - WITH ELECTRIC TRACTION AND ELECTRONIC BRUSH PRESSURE CONTROL


ORBITAL - WITH ELECTRIC TRACTION AND ELECTRONIC BRUSH PRESSURE CONTROL

Code		CT51 XP55 600 RPM LPTB01832	CT51 XP70 600 RPM LPTB01833	CT51 XP20" ORBITAL LPTB01670
PERFORMANCE				
Max theoretical productivity	m ² /h	2475	3150	2794
Cleaning path	mm	550	700	500
Water tank capacity (solution recovery)	l	50/53	50/53	50/53
Max running time	min	210	210	210
Voltage	V-Ah	24	24	24
Installed power	W	1080	1480	1080
Brush pressure	kg	26	31	45,7
Motor Brush RPM	rpm	600	600	2200
Squeegee width	mm	815	940	815
Max speed	km/h	4,5	4,5	4,2
Weight (Without Batteries)	kg	89,1	94,6	107,2
Dimension (LxWxH)	mm	1329 x 563 x 1033	1279 x 735 x 1033	1225 x 512 x 1033

STANDARD EQUIPMENT

	CT51 XP55 600 RPM	CT51 XP70 600 RPM	CT51 XP20" ORBITAL
PAD HOLDER			
MICROFIBER PAD HOLDER	SPPV01978	2x SPPV01983	-
DIAMOND PAD HOLDER	SPPV01348	2x SPPV01228	-
SQUEEGEE BLADES			
LATEX FRONT BLADE	MPVR08039 - 880mm	MPVR08040 - 1020mm	MPVR08039 - 880mm
LATEX REAR BLADE	MPVR08035 - 900mm	MPVR08036 - 1020mm	MPVR08035 - 900mm

CONSUMABLES (Codes available on price list)

	CONSUMABLES	CODE	CT51 C50	CT51 C55	CT51 B50	CT51 B55	CT51 BT55	CT51 BT60	CT51 BT70	CT51 XP60	CT51 XP70	CT51 XP55 600 RPM	CT51 XP70 600 RPM	CT51 XP55 R	CT51XP50 ORBITAL
	Brushes	available on price list	•	•	•	•	•	•	•	•	•	•	•		
	Roller Brushes	available on price list												•	
	Pad holder	available on price list	•	•	•	•	•	•	•	•	•	•	•		
	Pads / Super pads	available on price list	•	•	•	•	•	•	•	•	•	•	•		
	Orbital pads	available on price list													•
	Microfiber pads	available on price list										•	•		
	Diamond pads	available on price list										•	•		
	Squeegee blades	available on price list	•	•	•	•	•	•	•	•	•	•	•	•	•

OPTIONAL ACCESSORIES

	BRUSH HEAD	CODE	CT51 C50	CT51 C55	CT51 B50	CT51 B55	CT51 BT55	CT51 BT60	CT51 BT70	CT51 XP60	CT51 XP70	CT51 XP55 600 RPM	CT51 XP70 600 RPM	CT51 XP55 R	CT51XP20" ORBITAL
	C50 C55 B50 B55		NOT INTERCHANGEABLE BRUSH HEAD												
	BT55	KTRI04851					•	•	•	•	•	•	•	•	•
	BT60	KTRI04852					•	•	•	•	•	•	•	•	•
	BT70	KTRI04853					•	•	•	•	•	•	•	•	•
	XP55 600 RPM	KTRI04855								•	•	•	•	•	•
	XP70 600 RPM	KTRI04856								•	•	•	•	•	•
	XP55 ROLLER	KTRI04854								•	•	•	•	•	•
	XP20" ORBITAL	KTRI05787								•	•	•	•	•	•
	Kit Telematic Basic	KTRI06165			•	•									
		KTRI06163					•	•	•	•	•	•	•	•	•
	Kit Telematic Full	KTRI06164			•	•									
		KTRI06024					•	•	•	•	•	•	•	•	•

OPTIONAL ACCESSORIES

	OPTIONAL	CODE	CT51 C50	CT51 C55	CT51 B50	CT51 B55	CT51 BT55	CT51 BT60	CT51 BT70	CT51 XP60	CT51 XP70	CT51 XP55 600 RPM	CT51 XP70 600 RPM	CT51 XP55 R	CT51XP50 ORBITAL
	Chem dose kit	KTRI04846			•	•	•	•	•	•	•	•	•	•	•
	Splash guard 50/55 cm	KTRI05244		•	•	•	•					•			
	Splash guard 60 cm	KTRI05245						•		•					
	Splash guard 70 cm	KTRI05246							•		•		•		
	Tools bar	KTRI04848	•	•	•	•	•	•	•	•	•	•	•	•	•
	Auto-Refill System	KTRI04849	•	•	•	•	•	•	•	•	•	•	•	•	•
	External suction kit	KTRI02257	•	•	•	•	•	•	•	•	•	•	•	•	•
	BIOSAN RAPIDE WT (30 pcs / 30 days)	PRCH00578	•	•	•	•	•	•	•	•	•	•	•	•	•

BATTERIES AND BATTERY CHARGERS

BATTERIES	N°	CHARACTERISTICS	DIMENSION	RUNNING TIME	BATTERY CHARGERS
IPC gel battery BAAC00105	2	12V 105 Ah (C5)	345x170x285	210 min	DBL on board high freq. 24V 13 Ah- KTRI04845 DBL stand alone high frequency BLS010 - BACA00133
EXIDE gel battery BAAC00024	2	12V 105 Ah (C5)	345x174x283	210 min	DBL on board high freq. 24V 13 Ah- KTRI04845 DBL stand alone high frequency BLS010 BACA00133
EXIDE gel battery BAAC00132	2	12V 76 Ah (C5)	330x171x236	150 min	DBL on board high freq. 24V 13 Ah- KTRI04845 DBL stand alone high frequency BLS010 BACA00133
Acid tubular plate BAAC00136	2	12V 85 Ah (C5)	308x175x225	150 min	DBL on board high freq. 24V 13 Ah- KTRI04845 DBL stand alone high frequency BLS010 BACA00133 Stand alone Low frequency 24V 12 Ah BACA00060
Dry charge flat plate BAAC00009	2	12V 105 Ah (C5)	261x171x210	210 min	DBL on board high freq. 24V 13 Ah- KTRI04845 DBL stand alone high frequency BLS010 BACA00133 Stand alone Low frequency 24V 12 Ah BACA00060
Acid tubular plate BAAC00070	2	12V 118 Ah (C5)	345x170x285	210 min	DBL on board high freq. 24V 13 Ah- KTRI04845 DBL stand alone high frequency BLS010 BACA00133 Stand alone Low frequency 24V 12 Ah BACA00060

RECOMMENDED BATTERIES AND BATTERY CHARGER